
HTT 436,636 KÄTISYYDENVAIHTO

- Irroita Kahvan lukitusruuvi ① kehä-osasta (M6 Kuusiokoloruuvi)
- Löysää saranatappien lukkoruuveja ② (2mm Kuusiokoloruuvi)
- Siirrä saranatappeja ③ sisäänpäin ja irroita ovi saranakorvakkeista.
- Irroita saranakorvakkeet ④ ja kiinnitä ne kehän vasemmalle puolelle.
- Pyöräytä oven saranapuoli vasemmalle ja aseta saranatapit ③ saranakorvakkeisiin ④ saranatappeja ulospäin siirtämällä.
- Kiristä saranatappien lukkoruuvit ②
- Kiinnitä kahvan lukitusruuvi ① kehän oikealle puolelle
- Irroita kahvan kiinnitysruuvi ⑤ (Torx T-20 Ruuvi) ja käännä kahva vasenkätiseksi.
- Kiinnitä kahvan kiinnitysruuvi ⑤

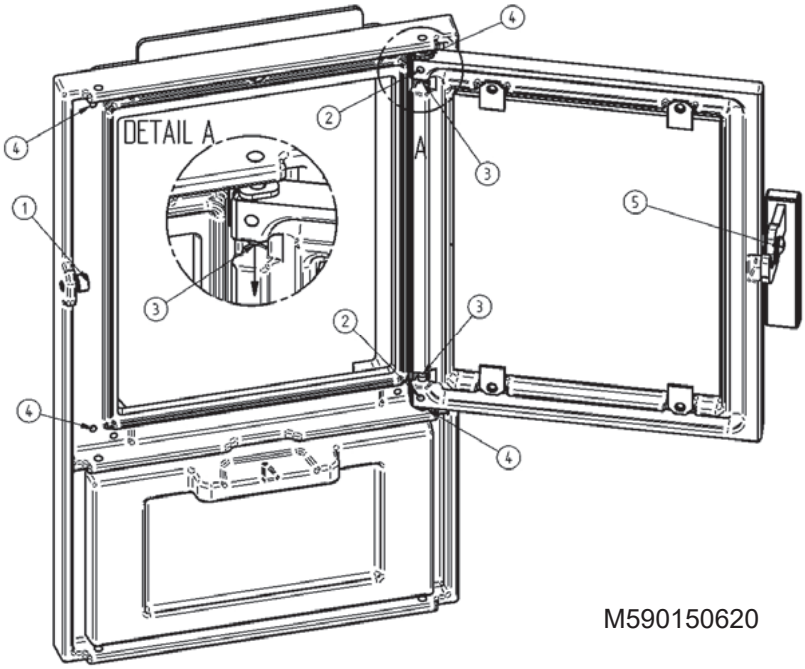

M590150620

HTT 436,636 CHANGING DOOR INTO LEFT-HANDED

- Detach locking screw of handle ① from frame (M6 Allen screw)
- Loose locking screws of hinge pins ② (2 mm Allen screw)
- Move hinge pins ③ inwards and remove door from hinge brackets
- Remove hinge brackets ④ and fix them to left side of frame
- Rotate hinge-side of door to the left and put hinge pins ③ to the hinge brackets ④ by moving hinge pins outwords
- Tighten locking screws ② of hinge pins
- Fix locking screw of handle ① to right side of frame
- Remove fixing screw of handle ⑤ (Torx T-20) and turn handle to left-handed
- Place fixing screw of handle ⑤

