








Asennusohje Yleiskoukusto


21200000

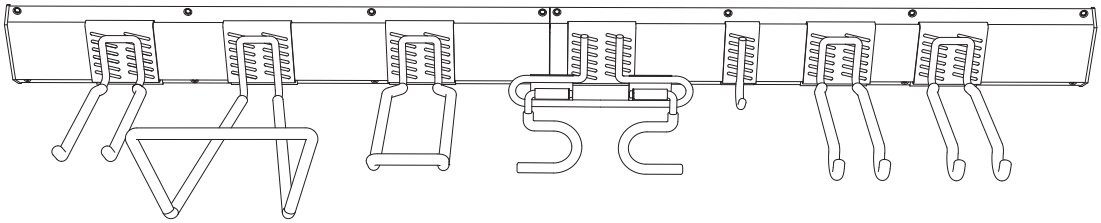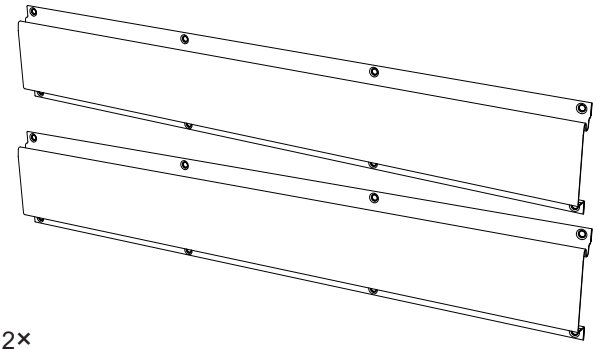

 2×	 1×	 1×	
 2×	 1×	 1×	 1×
 1×	 2×	 16×	 16×

1. Merkitse vatupassin avulla vaakasuora linja haluamaasi kohtaan seinässä.

2. Varmistu että kiskon ylä- ja alareunat tulevat oikein päin, kts. viereinen kuva.

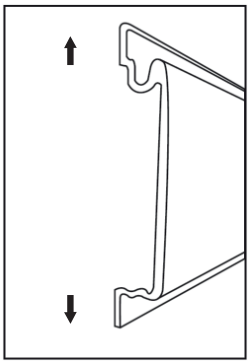


3. Kiinnitä kiskot seinään ruuveilla. Jos kiinnität kiskot vierekkäin, käytä kiskojen välissä muovista jatkokappaletta. Halutessasi kiinnitä päätykappaleet kiskoihin.

Huom! Mukana tulleet kiinikkeet ovat kiviseinään. Kiinnittäessäsi muunlaiseen seinään käytä soveltuvia kiinnikkeitä, tiedustele tarvittaessa rautakauppiaaltasi.


4. Aseta koukut haluamallesi kohdille kiskoon asettamalla yläreuna ensin uraan.









Huom! maksimikantavuus 100 kg / kisko.

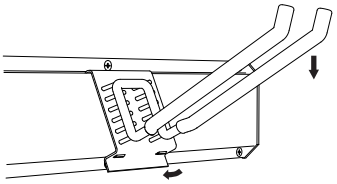

Manual

Hook set 21200000

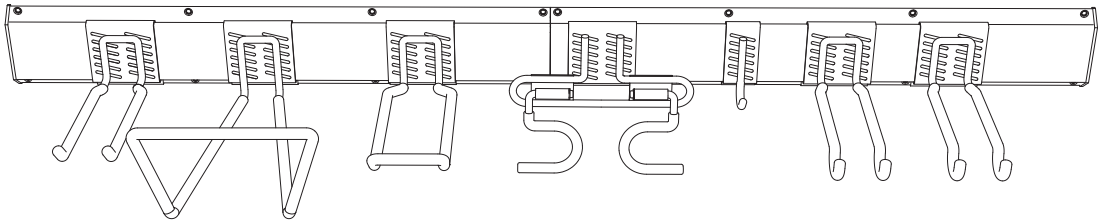

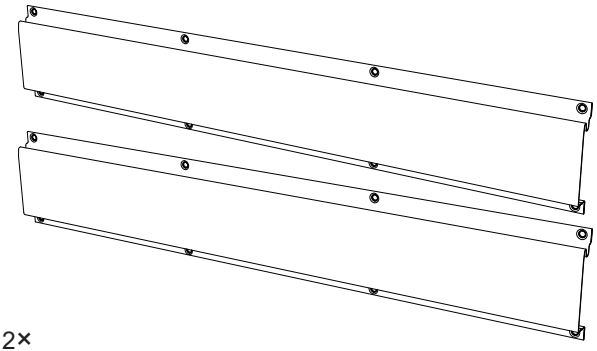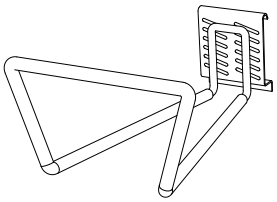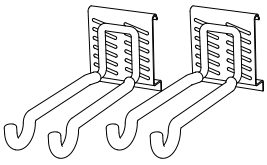
 2×		 1×	 1×
 2×	 1×	 1×	 1×
 1×	 2×	 16×	 16×

1. Mark out a horizontal line using a spirit level at your desired height on the wall.

2. Ensure you have the rail the correct way up, see the picture next.

3. Place the bottom of the rail along the marked line

4. Fasten the rail into place. After finish install first rail, use connector to link both rails. Install the second rail same as first.

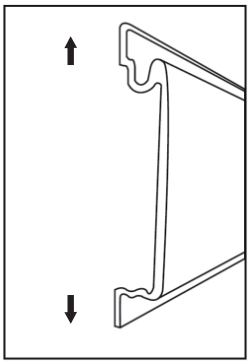

Please note: the fasteners supplied are intended for use in brick walls only. When fastening to timber of plasterboard walls, please ensure that you use appropriate fasteners.

5. Hang the hooks on the rails.

Please note: max weight 100 kg / rail.

